


**Caratteristiche - Features**


TIPO TYPE	KW assorb. - input	AMP 400 V.	PREVALENZA (metri) / PREVALENCE (meters)																		
			0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
<b>SQ 56/S</b>	0,16	0,55	73	62	48	30															
<b>SQ 63/S</b>	0,30	0,58	100	90	75	55	30														
<b>SQ 71/A</b>	0,53	1,40	195	190	180	168	156	141	127	110	95	78	55	37	28						
<b>SQ 71/B</b>	0,78	1,90	230	220	210	200	190	180	167	154	138	122	107	95	66	55					
<b>SQ 80/A</b>	1,15	1,90	330	320	310	300	290	280	270	258	245	232	220	208	188	170	145	120	90		
<b>SQ 80/B</b>	1,47	2,80	400	390	380	370	360	347	335	322	310	300	290	270	245	220	190	165	138	100	60

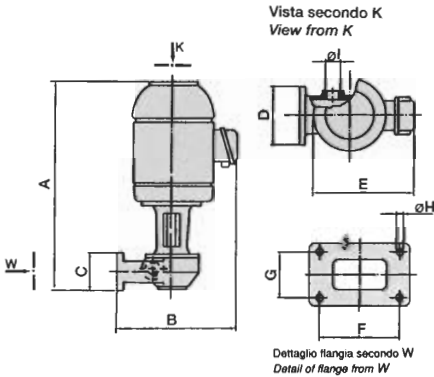

TIPO TYPE	A	B	C	D	E	F	G	ØH	ØI	PESO CON WEIGHT WITH KG.
<b>SQ 56/S</b>	255	170	60	95	140	75	45	7	3/8" 1/2"	3,87
<b>SQ 63/S</b>	300	180	60	95	158	75	45	7	3/8" 1/2"	4,95
<b>SQ 71/A</b>	330	245	80	145	175	115	60	9	1"	14,50
<b>SQ 71/B</b>	330	245	80	145	175	115	60	9	1"	15,20
<b>SQ 80/A</b>	335	250	80	145	210	115	60	9	1 1/4"	16,30
<b>SQ 80/B</b>	335	250	80	145	210	115	60	9	1 1/4"	17,30

**Caratteristiche - Features**

TIPO TYPE	KW assorb. - input	AMP 400 V.	PREVALENZA (metri) / PREVALENCE (meters)							
			0	2	4	6	8	10	12	
<b>AU 56</b>	0,16	0,55	11	9	8	6	4	2	0	
<b>AU 63</b>	0,30	0,52	14	12	10	8	6	4	0	

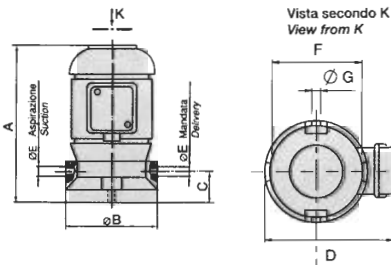

TIPO TYPE	A	ØB	C	D	ØE	ØF	ØG	PESO CON WEIGHT WITH KG.
	mm	mm	mm	mm	mm	mm	mm	
<b>AU 56</b>	215	115	48	144	3/8" 1/2"	95	7	4,33
<b>AU 63</b>	270	115	48	165	1/2"	95	7	5,05



Tipo SQ



Tipo AU