



## Caratteristiche - Features


TIPO TYPE	KW assorb. - input	AMP 400 V.	PREVALENZA (metri) / PREVALENCE (meters)																
			10	12	14	16	18	20	22	24	26	28	30	32	34	36			
AP 80 A	1,97	2,90	190	180	170	155	135	110	80	50	20								
AP 80 B	2,19	3,20	270	260	250	225	200	175	150	115	75								
AP 90 A	2,08	5,40	300	290	277	265	252	240	225	205	180	150	110						
AP 90 B	3,60	6,20	450	435	420	400	385	360	320	280	240	200	160						
AP 100 A	4,43	8,40	560	550	540	520	500	480	460	440	405	370	330	290	240				
AP 112 A	5,50	11,00	660	650	640	620	595	570	545	520	495	460	420	370	310				
AP 112 B	6,00	12,20	715	700	680	660	640	610	580	550	515	475	435	390	340	280			

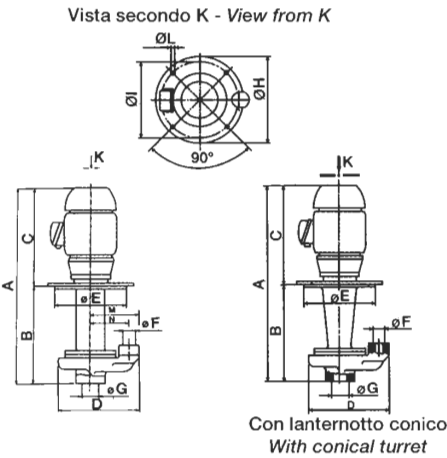

TIPO TYPE	pescante 320			pescante 450			pescante 610			pescante 860			C	D	ØE	ØF	ØG	ØH	ØI	ØL	M	N
	A	B	KG.	A	B	KG.	A	B	KG.	A	B	KG.										
AP80 A/50	620	320	36	750	450	42	910	610	44	1100	860	46	290	280	240	1-1/4"	2-1/2"	300	270	13	170	136
AP80 B/100	620	320	36	750	450	43	910	610	45	1100	860	47	290	280	240	1-1/4"	2-1/2"	300	270	13	170	136
AP90 A/150	660	320	41	790	450	47	950	610	49	1140	860	51	340	280	240	1-1/4"	2-1/2"	300	270	13	170	136
AP90 B/200	660	320	43	790	450	49	950	610	51	1140	860	53	340	280	240	1-1/2"	2-1/2"	300	270	13	170	136
AP100 A/300	700	320	48	830	450	54	990	610	56	1180	860	58	380	280	240	1-1/2"	2-1/2"	300	270	13	170	136
AP112 A/300	730	320	59	860	450	65	1020	610	67	1210	860	69	410	280	240	1-1/2"	2-1/2"	300	270	13	170	136
AP112 B/500	730	320	61	860	450	67	1020	610	69	1210	860	71	410	320	240	2"	2-1/2"	300	270	13	190	145

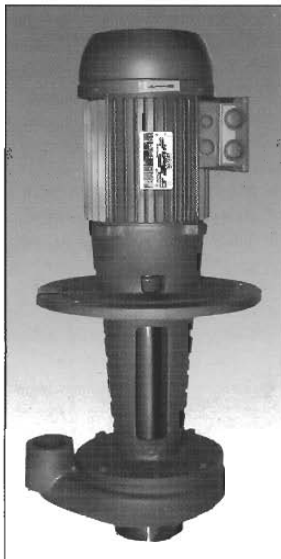

Pescante 320

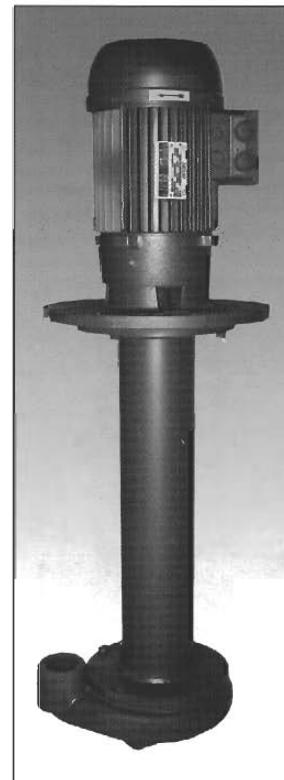

Pescante 450/860