




6 POLI / 6 POLES

CARATTERISTICHE TECNICHE / TECHNICAL FEATURES

1000 RPM 50 Hz / 1200 RPM 60 Hz

COD. code	TIPO type	MOMENTO kgmm moment kgmm		FORZA CENTR. centrifugal force KG	PESO KG weight kg		POTENZA power rating WATTS	CORR. MAX / max curr. A	
		50 Hz	60 Hz		50 Hz	60 Hz		V 230 - V 400	V 230 - 400
V2130	VV 10/BB 2S	90	63	100	11	10,5	100	0,60 - 0,35	0,50 - 0,30
V2140	VV 20/BB 2S	180	125	200	20	19	190	1,50 - 0,80	1,20 - 0,70
V2190	VV 30/BB 2S	312	220	350	28	27	380	1,60 - 0,90	1,30 - 0,75
V2200	VV 35/BB 2S	492	346	550	32	31	400	1,70 - 0,96	1,40 - 0,80
V2210	VV 40/BB 2S	909	638	1000	62	60	1200	3,60 - 2,08	3,20 - 1,80
V2220	VV 50/BB 2S	1636	1150	1800	102	98	1900	5,50 - 3,18	5,00 - 2,70
V2230	VV 55/BB 2S	2727	1910	3000	135	122	2000	6,60 - 3,80	5,90 - 3,10
V2240	VV 60/BB 2S	3000	2120	3500	178	168	3400	9,00 - 5,20	8,00 - 4,50
V2245	VV 65/BB 2S	4200	3000	4200	190	180	3400	9,20 - 5,40	8,20 - 4,70
V2250	VV 70/BB 2S	5470	3890	6000	250	239	4500	12,20 - 7,10	11,10 - 6,00
V2260	VV 80/BB 2S	7750	5520	9000	330	315	7500	13,80 - 7,97	12,20 - 6,90
V2270	VV 100/BB 2S	9540	6710	11000	400	380	8500	15,50 - 8,95	13,70 - 7,80
V2280	VV 120/BB 2S	1200	9100	13500	450	430	9800	18,00 - 10,40	16,00 - 8,90

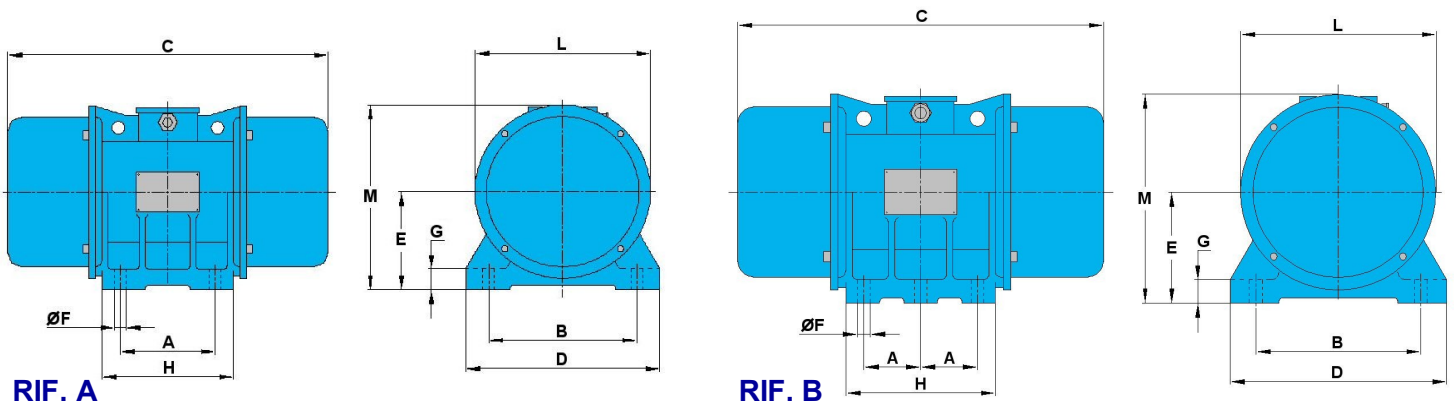

DIMENSIONI / DIMENSIONS

1000 RPM 50 Hz / 1200 RPM 60 Hz

COD. code	TIPO type	RIF. ref	A	B	C	D	E	F	G	H	L	M
V2130	VV 10/BB 2S	A	90	125	302	156	80	13	17	134	159	183
V2140	VV 20/BB 2S	A	105	140	395	172	90	13	20	149	178	202
V2190	VV 30/BB 2S	A	120	170	410	206	104	17	25	172	201	230
V2200	VV 35/BB 2S	A	120	170	485	206	104	17	25	172	201	230
V2210	VV 40/BB 2S	A	140	190	580	230	120	17	30	200	246	257
V2220	VV 50/BB 2S	A	155	225	640	275	150	22	30	258	292	295
V2230	VV 55/BB 2S	A	155	255	720	310	162	24	30	261	312	322
V2240	VV 60/BB 2S	A	180	280	700	350	180	26	35	280	348	352
V2245	VV 65/BB 2S	A	180	280	700	350	180	26	35	280	348	352
V2250	VV 70/BB 2S	A	200	320	787	404	204	29	35	340	398	402
V2260	VV 80/BB 2S	B	100	320	885	456	237	32	50	406	465	470
V2270	VV 100/BB 2S	B	125	380	985	456	237	32	50	406	465	470
V2280	VV 120/BB 2S	B	125	380	985	456	237	32	50	406	465	470